

*Hensley's*

# ***Mechanical Coupler***

***For Komatsu Excavators & RTB's.***



***For Models  
PC20 - PC350***

***Mount multiple types of  
attachments quickly  
and safely without  
any modification.***



# Machine operator can change attachments quickly and safely without assistance.

## COUPLER FEATURES

### Safety is assured.


Attachments can be changed in one simple operation. Once engaged, the adjustment bolt is secured with a lock plate for safety.

### No modification is required.


No modification is required for any of the attachments, and the fact that hydraulics are not required, contributes to your cost saving.

### Efficient Operation

Attachments can be changed without pin removal, a feature which makes attachment changing a quick, safe and clean operation.

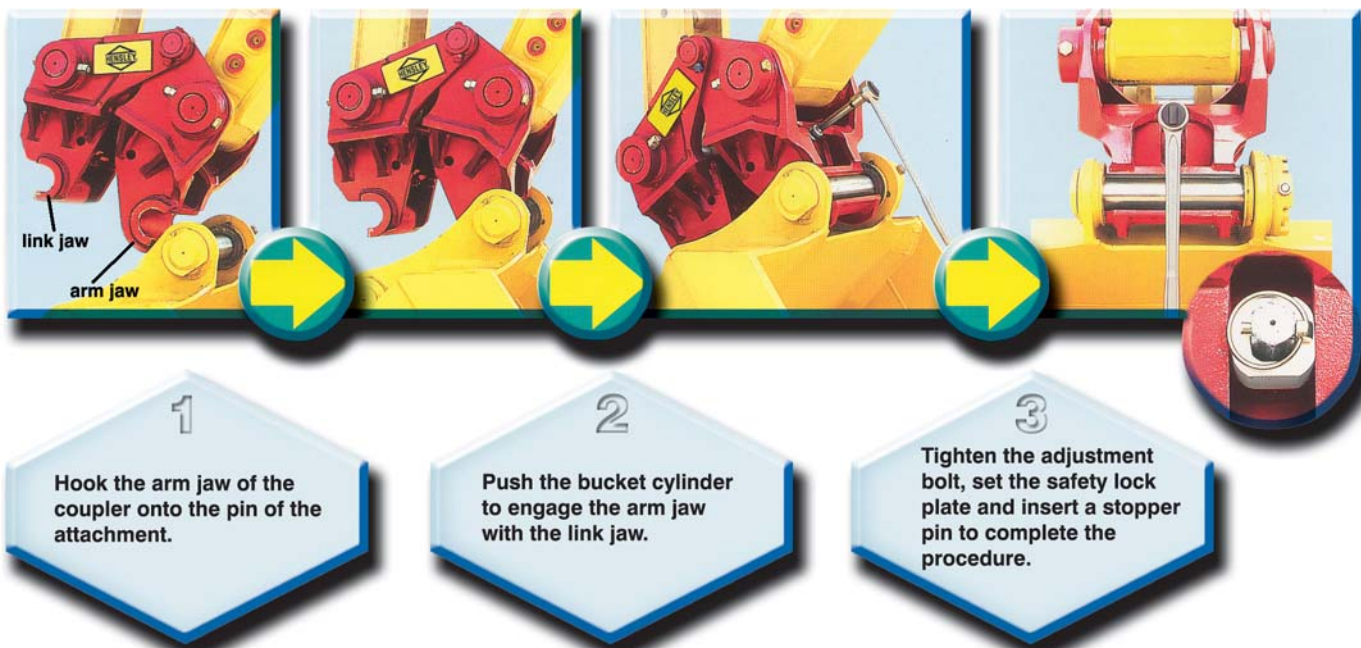

**NOTE:** When the coupler is mounted, the attachment may interfere with a boom or cabin.

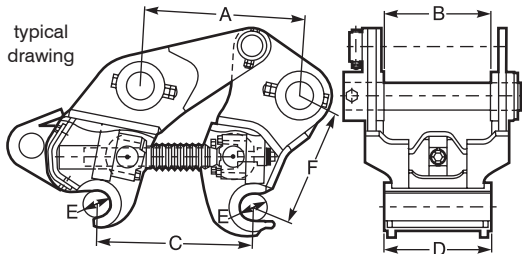

accommodates variable pin centers

MODEL	JKAL20	JKAL40	JKAL60	JKAL100	JKAL200	JKAL300
Dimensions inches (mm)	<b>A</b> 7.362 - 8.228 (187 - 209)	93.724 - 10.905 (247 - 277)	12.047 - 13.503 (306 - 343)	15.315 - 17.283 (389 - 439)	17.519 - 19.803 (445 - 503)	19.173 - 21.811 (488 - 554)
	<b>B</b> 5.708 (145)	6.692 (170)	7.952 (202)	10.275 (261)	12.834 (326.5)	13.622 (346)
	<b>C</b> 5.511 - 9.842 (140 - 250)	7.086 - 12.992 (180 - 330)	8.858 - 15.354 (225 - 390)	12.204 - 21.259 (310 - 540)	14.448 - 21.259 (368 - 540)	15.826 - 24.606 (402 - 625)
	<b>D</b> 5.629 (143.5)	6.614 (168)	7.795 (198)	10.157 (258)	12.795 (325)	13.582 (345)
	<b>E</b> Ø1.377 (Ø35)	Ø1.771 (Ø45)	Ø1.968 (Ø50)	Ø2.362 (Ø60)	Ø3.149 (Ø80)	Ø3.543 (Ø90)
	<b>F</b> 7.086 (180)	8.267 (210)	9.645 (245)	11.220 (285)	13.779 (350)	15.590 (396)

TOOL	SIZE	NO. ON TOOL	
Ratchet	1/2" Drive	LVR4	09026-00250
	3/4" Drive	VE650	09026-00500
Extension	1/2" Drive	VE415 (384072)	09022-00250
	3/4" Drive	VE620	09022-00250
Socket	17MM	17MM	09021-01725
	19MM	19MM	09021-01928
	24MM	24MM	09021-02436
	30MM	30MM	09021-103044

Weight* lbs. (kgs.)	66.0 (30.0)	110.0 (50.0)	187.0 (85.0)	286.0 (130.0)	573.0 (260.0)	970.0 (440)
Appropriate model	PC20 - PC30 PC28UU - PC38UU	PC40 - PC45	PC60 - PC90 PC50UU	PC100 - PC130 PC75UU	PC200 - PC230 PC128UU	PC300 - PC350 PC228UU

\*Pins are not included. \*1: The above is subject to technical alteration without notice. \*2: Other manufacturer's attachments are acceptable.

**SAFETY FIRST:** Hensley recommends that you use a soft-faced hammer and ANSI-approved (Z87.1) eye protection while using our products.

### Hensley Industries, Inc.

2108 Joe Field Road • Dallas, Texas 75229 U.S.A.

### Hensley Attachments

A Division of Hensley Industries, Inc.

800 South Fifth • Mansfield, Texas 76063 U.S.A

(800) 433 - 3144

(817) 477 - 3167

www.hensleyind.com

### Your Authorized Hensley Dealer

Copyright © 2003 Hensley Industries, Inc.

This publication is protected under the copyright laws of the United States. Unauthorized duplication or distribution is prohibited.